






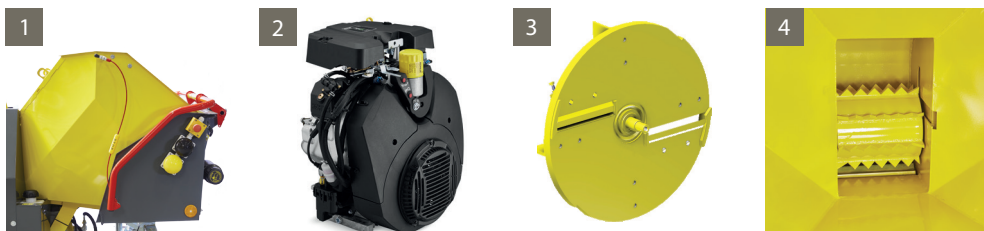


WOOD/SERIES



-  CUTTING DISC TECHNOLOGY
-  ECO CHIPS
-  BIO DEGRADABLE LUBRICANT
-  NO STRESS
-  ELECTRIC CONTROL
-  270° ADJUSTABLE CHIMNEY
-  FOLDING HOPPER

POWERFUL AND COMPACT FOR LESS THAN 750 KG, A MUST FOR ALL PROFESSIONALS



1- FOLDING HOPPER for transport

2 - ENGINE: KOHLER ECH980 38 HP / 28.3 kW - 2cyl

3- CUTTING DISC TECHNOLOGY two fully adjustable blades are mounted in a cutting disc and precisely adjusted to a counter-edge

4 - HORIZONTAL FEED ROLLER

TECHNICAL DATA

Ref	WS1638P	Consumption	4,2 L/h
Engine	KOHLER EFI 38 CV	Multidirectionnal chimney	270°
Power	38 HP/28,3 kW	Chimney outlet height	2440 mm
Clutch	Engine tension	Machine weight	690 kg
Cowling	Metal safety hoods	Homologation remorque MMTA	750 kg
Engine swept volume cm3	999 cm3 2-cyl	Hopper dimensions (LxW)	1530 x 1075 mm
Fuel	Petrol	Hopper loading height	700 mm
Admissible diameter	16 cm	L x W x H	3920 x 1400 x 2470 mm
Disc diameter	510 mm		
Disc weight	50 kg		
Blade	2		
Feed roll width	240 mm		
Feed roll diameter	245 mm		
No. Of axles / Allowable road weight axles	1 / 1050 kg		
Tyre dimensions	155/70 R13		
Tank capacity	17 L		